



Internal Use Only

<http://biz.lgservice.com>

Multi V Air Conditioner

SVC MANUAL(Exploded View)

MODEL : ARNU07GB3G4 ARNU18GB4G4
ARNU09GB3G4 ARNU24GB4G4
ARNU12GB3G4
ARNU15GB3G4

CAUTION

Before Servicing the unit, read the safety precautions in General SVC manual.
Only for authorized service personnel.

1. Specification

Type			Ceiling Concealed Duct (Built-in)		
Accessory			PBSGB30/PBSC30	PBSGB30/PBSC30	PBSGB30/PBSC30
Model		Unit	ARNU07GB3G4	ARNU09GB3G4	ARNU12GB3G4
Cooling Capacity		kW	2.2	2.8	3.6
		kcal/h	1,900	2,400	3,100
		Btu/h	7,500	9,600	12,300
Heating Capacity		kW	2.5	3.2	4
		kcal/h	2,200	2,800	3,400
		Btu/h	8,500	10,900	13,600
Casing			Galvanized Steel Plate	Galvanized Steel Plate	Galvanized Steel Plate
Dimensions (WxHxD)	Body	mm	820 x 190 x 575	820 x 190 x 575	820 x 190 x 575
		inch	32-9/32 x 7-15/32 x 22-5/8	32-9/32 x 7-15/32 x 22-5/8	32-9/32 x 7-15/32 x 22-5/8
Coil	Rows x Columns x FPI		2 x 11 x 21	2 x 11 x 21	2 x 11 x 21
	Face Area	m ³	0.16	0.16	0.16
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1
	Running Current	A	0.76	0.76	0.76
	Air Flow Rate(H / M / L) (High Mode-factor set)	CMM	8.0 / 6.5 / 5.5	9.0 / 7.0 / 6.0	10.0 / 8.0 / 6.5
		cfm	283 / 229 / 194	318 / 247 / 212	353 / 283 / 229
	External Static Pressure	mmAq(Pa)	2(20)	2(20)	2(20)
	Air Flow Rate(H / M / L) (Standard Mode)	CMM	8.0 / 6.5 / 5.5	9.0 / 7.0 / 6.0	10.0 / 8.0 / 6.5
		cfm	283 / 229 / 194	318 / 247 / 212	353 / 283 / 229
	External Static Pressure	mmAq(Pa)	0(0)	0(0)	0(0)
Drive		Direct	Direct	Direct	
Motor type		BLDC	BLDC	BLDC	
Temperature Control			Microprocessor, Thermostat for cooling and heating	Microprocessor, Thermostat for cooling and heating	Microprocessor, Thermostat for cooling and heating
Sound Absorbing Thermal Insulation Material			Foamed polystyrene	Foamed polystyrene	Foamed polystyrene
Air Filter			-	-	-
Safety Device			Fuse, Thermal Fuse for Fan Motor	Fuse, Thermal Fuse for Fan Motor	Fuse, Thermal Fuse for Fan Motor
Pipe Connections	Liquid Side	mm(inch)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)
	Gas Side	mm(inch)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)
	Drain Pipe(Internal Dia.)	mm(inch)	25.4(1)	25.4(1)	25.4(1)
Net Weight		kg(lbs)	21(46.3)	21(46.3)	21(46.3)
Noise Level(Sound Press, 1m, H / M / L)		dB(A)	33 / 32 / 29	34 / 33 / 32	35 / 34 / 33
Power Supply		Ø, V, Hz	1, 220-240, 50 1, 220, 60	1, 220-240, 50 1, 220, 60	1, 220-240, 50 1, 220, 60
Refrigerant Control			EEV	EEV	EEV
Power cable		mm ²	CV1.5 x 3C	CV1.5 x 3C	CV1.5 x 3C
Transmission cable		mm ²	CVV-SB 1.0~1.5 x 2C	CVV-SB 1.0~1.5 x 2C	CVV-SB 1.0~1.5 x 2C

Notes:-

1. Capacities are based on the following conditions:

- Cooling
- Indoor temp. 27°C[80.6°F]DB/ 19°C[66.2°F]WB
 - Outdoor temp. 35°C[95°F]DB/ 24°C[75.2°F]WB
 - Interconnecting Piping Length 7.5m(24.6ft)
 - Level Difference of Zero
- Heating
- Indoor temp. 20°C[68°F]DB/ 15°C[59°F]WB
 - Outdoor temp. 7°C[44.6°F]DB/ 6°C[42.8°F]WB
 - Interconnecting Piping Length 7.5m(24.6ft)
 - Level Difference of Zero

2. Capacities are net capacities

3. Due to our policy of innovation some specifications may be changed without notification

4. EEV: Electronic Expansion Valve

5. To be added for more available Models

Conversion Formula

kcal/h= kW x 860
 Btu/h = kW x 3412
 cfm = m³/min x 35.3
 l/s = CMM x 1000/60

Type			Ceiling Concealed Duct (Built-in)		
Accessory			PBSGB30/PBSC30	PBSGB40/PBSC40	PBSGB40/PBSC40
Model		Unit	ARNU15GB3G4	ARNU18GB4G4	ARNU24GB4G4
Cooling Capacity		kW	4.5	5.6	7.1
		kcal/h	3,900	4,800	6,100
		Btu/h	15,400	19,100	24,200
Heating Capacity		kW	5	6.3	8
		kcal/h	4,300	5,400	6,900
		Btu/h	17,100	21,500	27,300
Casing			Galvanized Steel Plate	Galvanized Steel Plate	Galvanized Steel Plate
Dimensions (WxHxD)	Body	mm	820 x 190 x 575	1,100 x 190 x 575	1,100 x 190 x 575
		inch	32-9/32 x 7-15/32 x 22-5/8	43-5/16 x 7-15/32 x 22-5/8	43-5/16 x 7-15/32 x 22-5/8
Coil	Rows x Columns x FPI		2 x 11 x 21	3 x 10 x 18	3 x 10 x 18
	Face Area	m ³	0.16	0.23	0.23
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W	19 x 1, 5 x 1	19 x 2	19 x 2
	Running Current	A	0.76	0.97	0.97
	Air Flow Rate(H / M / L) (High Mode-factor set)	CMM	11.0 / 10.0 / 8.0	14.0 / 12.0 / 10.0	17.0 / 15.0 / 10.0
		cfm	388 / 353 / 283	494 / 424 / 353	600 / 530 / 353
	External Static Pressure	mmAq(Pa)	2(20)	2(20)	2(20)
	Air Flow Rate(H / M / L) (Standard Mode)	CMM	11.0 / 10.0 / 8.0	14.0 / 12.0 / 10.0	17.0 / 15.0 / 10.0
		cfm	388 / 353 / 283	494 / 424 / 353	600 / 530 / 353
	External Static Pressure	mmAq(Pa)	0(0)	0(0)	0(0)
Drive		Direct	Direct	Direct	
Motor type		BLDC	BLDC	BLDC	
Temperature Control			Microprocessor, Thermostat for cooling and heating	Microprocessor, Thermostat for cooling and heating	Microprocessor, Thermostat for cooling and heating
Sound Absorbing Thermal Insulation Material			Foamed polystyrene	Foamed polystyrene	Foamed polystyrene
Air Filter			-	-	-
Safety Device			Fuse, Thermal Fuse for Fan Motor	Fuse, Thermal Fuse for Fan Motor	Fuse, Thermal Fuse for Fan Motor
Pipe Connections	Liquid Side	mm(inch)	Ø6.35(1/4)	Ø6.35(1/4)	Ø9.52(3/8)
	Gas Side	mm(inch)	Ø12.7(1/2)	Ø12.7(1/2)	Ø15.88(5/8)
	Drain Pipe(Internal Dia.)	mm(inch)	25.4(1)	25.4(1)	25.4(1)
Net Weight		kg(lbs)	21(46.3)	26(57.3)	26(57.3)
Noise Level(Sound Press, 1m, H / M / L)		dB(A)	41 / 40 / 37	43 / 40 / 37	46 / 43 / 37
Power Supply		Ø, V, Hz	1, 220-240, 50 1, 220, 60	1, 220-240, 50 1, 220, 60	1, 220-240, 50 1, 220, 60
Refrigerant Control			EEV	EEV	EEV
Power cable		mm ²	CV1.5 x 3C	CV1.5 x 3C	CV1.5 x 3C
Transmission cable		mm ²	CVV-SB 1.0~1.5 x 2C	CVV-SB 1.0~1.5 x 2C	CVV-SB 1.0~1.5 x 2C

Notes:-

1. Capacities are based on the following conditions:

- Cooling
 - Indoor temp. 27°C[80.6°F]DB/ 19°C[66.2°F]WB
 - Outdoor temp. 35°C[95°F]DB/ 24°C[75.2°F]WB
 - Interconnecting Piping Length 7.5m(24.6ft)
 - Level Difference of Zero
- Heating
 - Indoor temp. 20°C[68°F]DB/ 15°C[59°F]WB
 - Outdoor temp. 7°C[44.6°F]DB/ 6°C[42.8°F]WB
 - Interconnecting Piping Length 7.5m(24.6ft)
 - Level Difference of Zero

2. Capacities are net capacities

3. Due to our policy of innovation some specifications may be changed without notification

4. EEV: Electronic Expansion Valve

5. To be added for more available Models

Conversion Formula

kcal/h= kW x 860
 Btu/h = kW x 3412
 cfm = m³/min x 35.3
 l/s = CMM x 1000/60

2. List of Functions


Category	Function	ARNU07GB3G4+PBSGB30(Acc'y), PBSC30(Acc'y) ARNU09GB3G4+PBSGB30(Acc'y), PBSC30(Acc'y) ARNU12GB3G4+PBSGB30(Acc'y), PBSC30(Acc'y) ARNU15GB3G4+PBSGB30(Acc'y), PBSC30(Acc'y) ARNU18GB4G4+PBSGB40(Acc'y), PBSC40(Acc'y) ARNU24GB4G4+PBSGB40(Acc'y), PBSC40(Acc'y)
Air flow	Air supply outlet	1
	Airflow direction control(left & right)	-
	Airflow direction control(up & down)	-
	Auto swing(left & right)	-
	Auto swing(up & down)	-
	Airflow steps(fan/cool/heat)	3/3/3
	Chaos swing	-
	Chaos wind(auto wind)	-
	Jet cool(Power wind)	-
	Swirl wind	-
Air purifying	Deodorizing filter	X
	Plasma air purifier	X
	Prefilter(washable / anti-fungus)	O
Installation	Drain pump	O
	E.S.P. control	O
	Electric heater(operation)	X
	High ceiling operation	-
Reliability	Hot start	O
	Self diagnosis	O
	Soft dry operation	O
Convenience	Auto changeover	O(only heat recovery)
	Auto cleaning	X
	Auto operation(artificial intelligence)	O(only heat pump or cooling only)
	Auto restart operation	O
	Child lock	O
	Forced operation	-
	Group control	O
	Sleep mode	X
	Timer(on/off)	O
	Timer(weekly)	O
Individual control	Two thermistor control	O
	Standard wired remote controller	Accessory
	Wide Character wired remote controller	Accessory
	Picto wired remote controller	Accessory
	Deluxe wired remote controller	Accessory
	Simple wired remote controller	Accessory
	Wired remote controller(for hotel use)	Accessory
	Wireless remote controller(simple)	X
Wireless LCD remote control	Accessory	
Special function kit	Zone control	Accessory
	CTIE	-
	Electro thermostat	-

O : Applied X : Not applied - : No relation

Option : Model name & price are different according to options, and assembled in factory with main unit.

Accessory : Installed at field, ordered and purchased separately by the corresponding model name, supplied with separate package.

3. Piping Diagrams

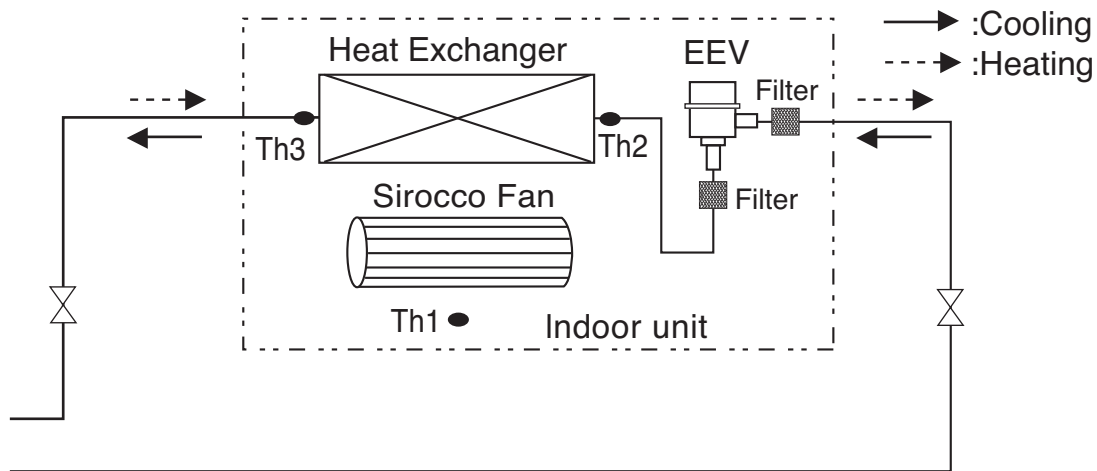

Refrigerant pipe connection port diameter



[Unit : mm(inch)]

CHASSIS	MODEL	GAS
B3	ARNU073B3G4+PBSGB30(Acc'y), PBSC30(Acc'y)	Ø12.7(1/2)
	ARNU093B3G4+PBSGB30(Acc'y), PBSC30(Acc'y)	Ø12.7(1/2)
	ARNU123B3G4+PBSGB30(Acc'y), PBSC30(Acc'y)	Ø12.7(1/2)
	ARNU153B3G4+PBSGB30(Acc'y), PBSC30(Acc'y)	Ø12.7(1/2)
B4	ARNU183B4G4+PBSGB40(Acc'y), PBSC40(Acc'y)	Ø12.7(1/2)
	ARNU243B4G4+PBSGB40(Acc'y), PBSC40(Acc'y)	Ø15.88(5/8)

LOC.	Description	PCB Connector (Color)
Th1	Thermistor for room air temperature	CN-ROOM (Yellow)
Th2	Thermistor for pipe in temperature	CN-PIPE/IN (White)
Th3	Thermistor for pipe out temperature	CN-PIPE/OUT (Red)

4. Wiring Diagrams

B3/B4 Chassis

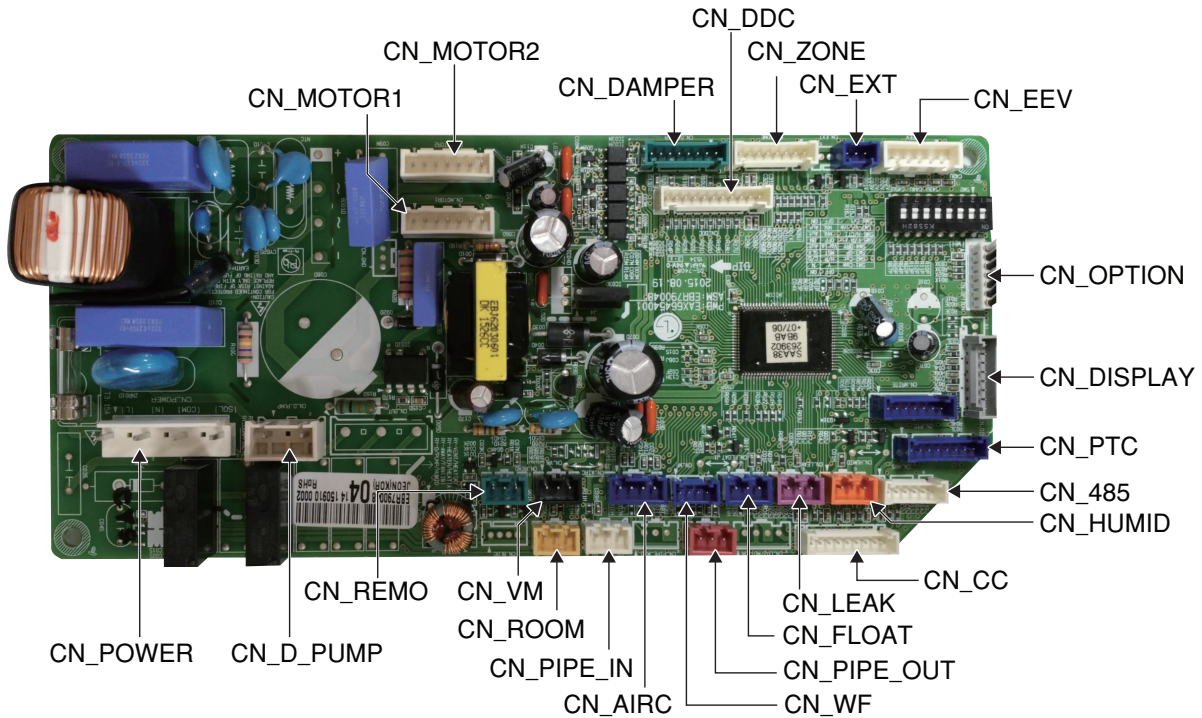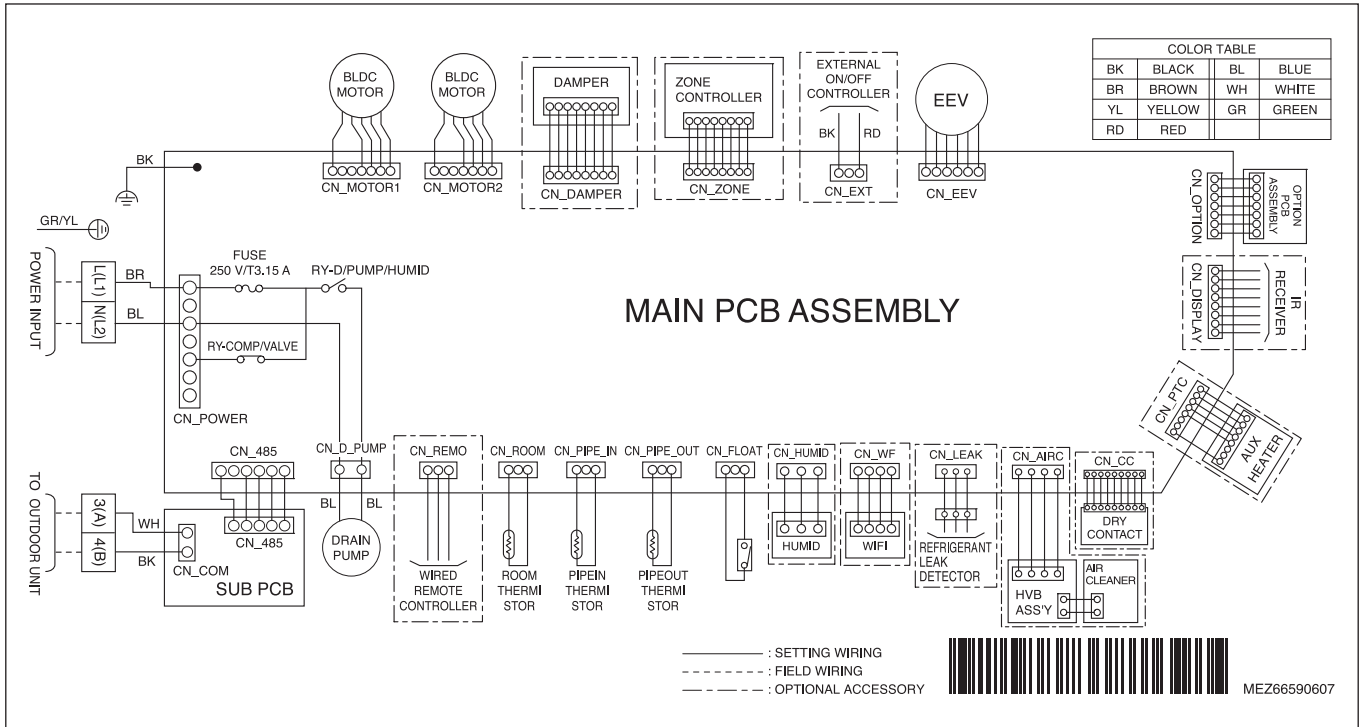

5. DIP Switch Setting

1. Indoor Unit

	Function	Description	Setting Off	Setting On	Default
SW1	Communication	N/A (Default)	-	-	Off
SW2	Cycle	N/A (Default)	-	-	Off
SW3	Group Control	Selection of Master or Slave	Master	Slave	Off
SW4	Dry Contact Mode	Selection of Dry Contact Mode	Wired/Wireless remote controller Selection of Manual or Auto operation Mode	Auto	Off
SW5	Installation	Fan continuous operation	Continuous operation Removal	-	Off
SW6	Heater linkage	N/A	-	-	Off
SW7	Ventilator linkage	Selection of Ventilator linkage	Linkage Removal	Working	Off
	Vane selection (Console)	Selection of up/down side Vane	Up side + Down side Vane	Up side Vane Only	
	Region selection	Selection tropical region	General model	Tropical model	
SW8	Etc.	Spare	-	-	Off

⚠ CAUTION

For Multi V Models, DIP switch 1, 2, 6, 8 must be set OFF.

2. Outdoor Unit

In case that the products meet specific conditions, "Auto addressing" function can start automatically with the improved speed by turning the DIP switch #3 of the outdoor unit and resetting the power.


* Specific conditions:

- All names of the indoor units are ARNU****4.
- The serial number of Multi V super IV (outdoor units) is after October 2013.

DIP switch 7 segment




Outdoor Unit PCB

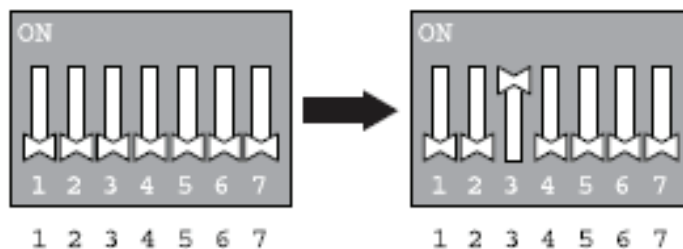

Outdoor Unit DIP Switch

6. Exploded View


B3 Chassis

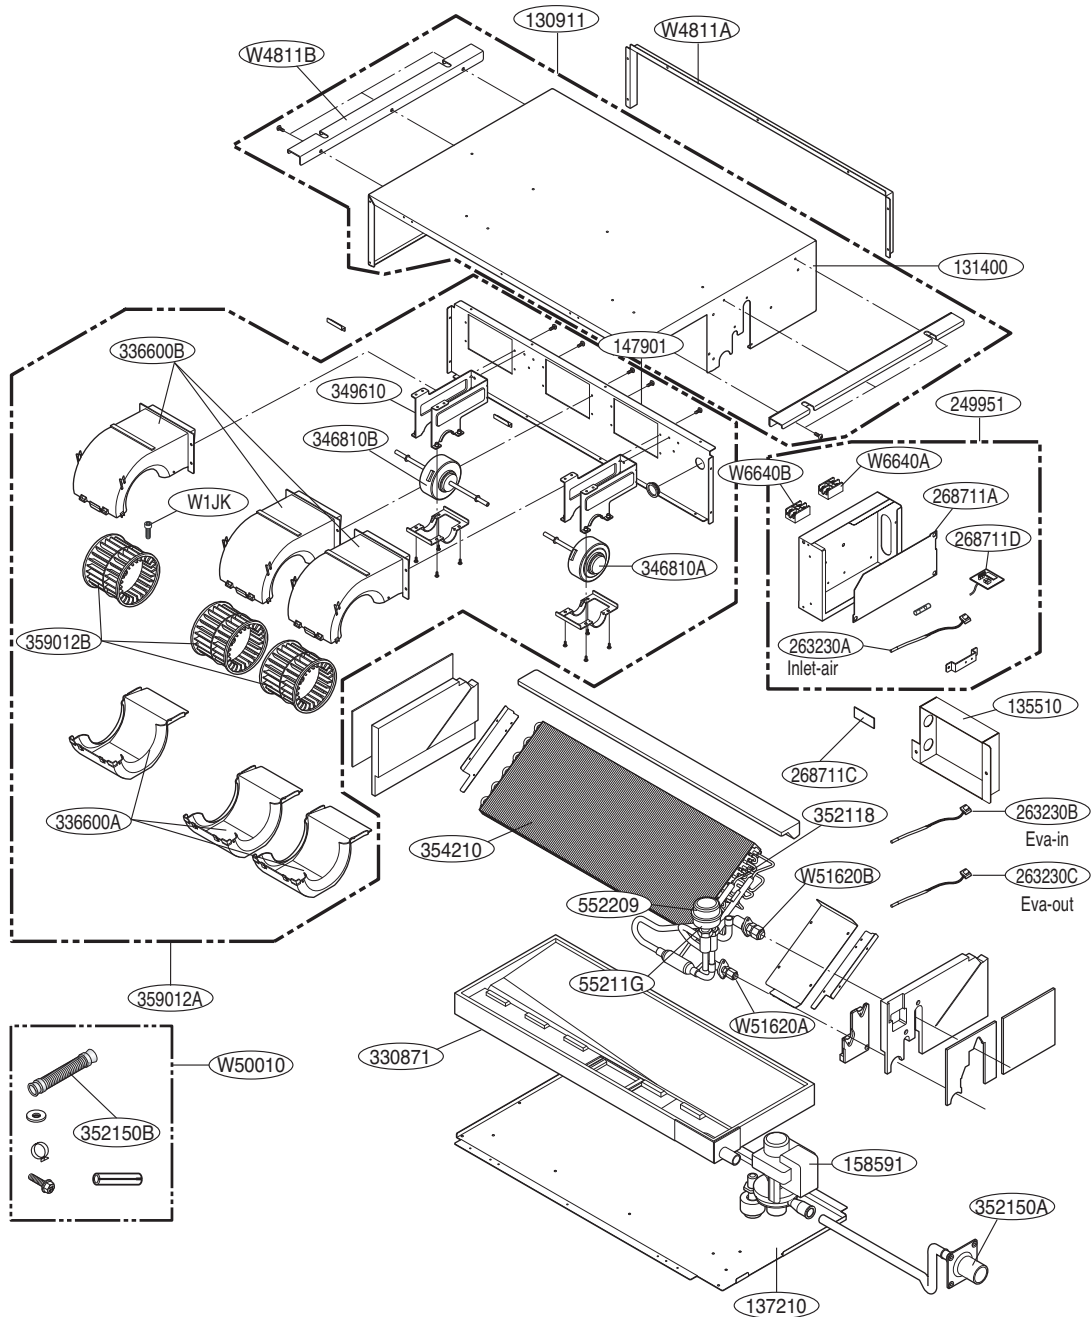

SVC No.	Description	Remark (Color)
263230A	Thermistor for room air temperature	CN-ROOM (Yellow)
263230B	Thermistor for pipe in temperature	CN-PIPE_IN (White)
263230C	Thermistor for pipe in temperature	CN-PIPE_OUT (Red)
268711A	PCB for main	210 mm X 95 mm
268711C	PCB for option	25 mm X 25 m
268711D	PCB for communication	65 mm X 45 mm

Note) * Please ensure GCSC since the replacement parts may be changed depending upon the buyer's request.
Please check the correct parts in View RPL(Replacement Part List) on GCGS.
(GCGS Website <http://biz.Lgservice.com>)

B4 Chassis

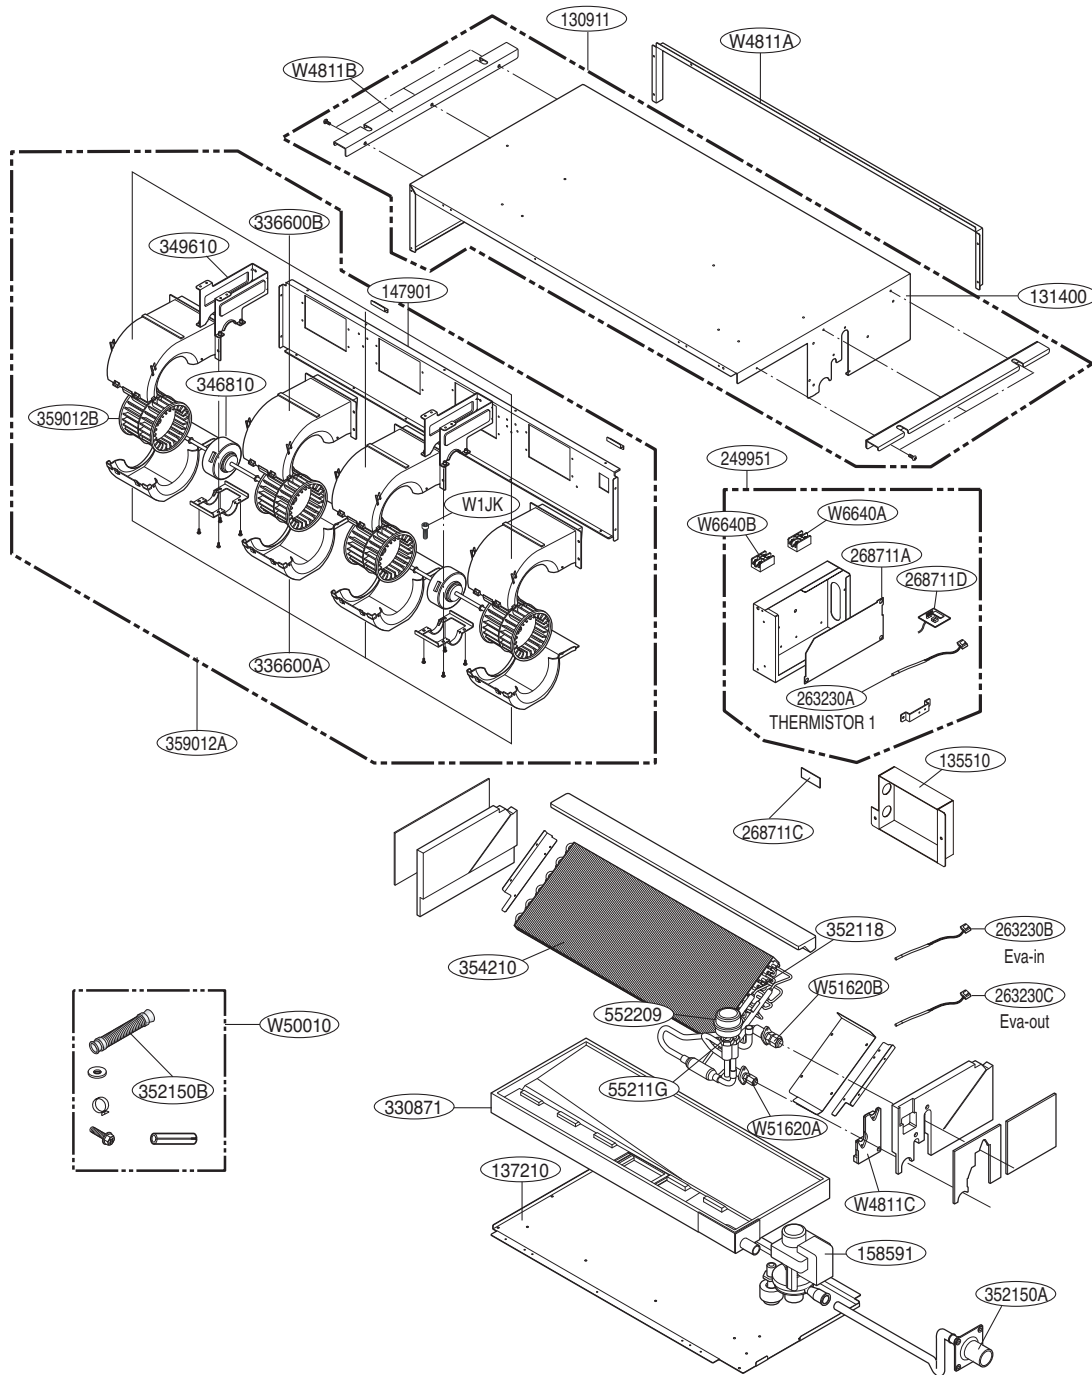

SVC No.	Description	Remark (Color)
263230A	Thermistor for room air temperature	CN-ROOM (Yellow)
263230B	Thermistor for pipe in temperature	CN-PIPE_IN (White)
263230C	Thermistor for pipe in temperature	CN-PIPE_OUT (Red)
268711A	PCB for main	210 mm X 95 mm
268711C	PCB for option	25 mm X 25 m
268711D	PCB for communication	65 mm X 45 mm

Note) * Please ensure GCSC since the replacement parts may be changed depending upon the buyer's request.
Please check the correct parts in View RPL(Replacement Part List) on GCGS.
(GCGS Website <http://biz.Lgservice.com>)

7. Self-diagnosis function


Error Indicator

- This function indicates types of failure in self-diagnosis and occurrence of failure for air condition.
- Error mark is displayed on display window of indoor units and wired remote controller, and 7-segment LED of outdoor unit control board as shown in the table.
- If more than two troubles occur simultaneously, lower number of error code is first displayed.
- After error occurrence, if error is released, error LED is also released simultaneously.

Error Display

- 1st,2nd,3rd LED of 7-segment indicates error number, 4th LED indicates unit number. Indicates unit number.
(* = 1:Master, 2 : Slave 1, 3 : Slave 2)

Ex) 211 : No.21 error of master unit
 213 : No.21 error of slave2
 1051 : No.105 error of master unit

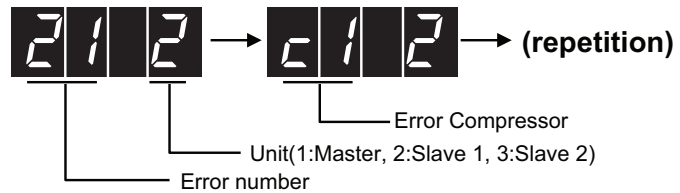

※ Refer to the DX-Ventilation manual for DX-Ventilation error code

Display			Title	Cause of Error	
Indoor unit related error	0	1	-	Air temperature sensor of indoor unit	Air temperature sensor of indoor unit is open or short
	0	2	-	Inlet pipe temperature sensor of indoor unit	Inlet pipe temperature sensor of indoor unit is open or short
	0	3	-	Communication error : wired remote controller ↔ indoor unit	Failing to receive wired remote controller signal in indoor unit PCB
	0	4	-	Drain pump	Malfunction of drain pump
	0	5	-	Communication error : Indoor communication PCB ↔ indoor unit	Indoor Unit PCB did not receive signal from Indoor communication PCB for over 3 minutes continuously
	0	6	-	Outlet pipe temperature sensor of indoor unit	Outlet pipe temperature sensor of indoor unit is open or short
	0	9	-	Indoor EEPROM Error	In case when the serial number marked on EEPROM of Indoor unit is 0 or FFFFFF
	1	0	-	Poor fan motor operation	Disconnecting the fan motor connector / Failure of indoor fan motor lock
	2	3	0	Refrigerant leakage sensing error	Refrigerant leakage sensing error and sensor defect error
	2	3	7	Communication defect in indoor communication PCB ↔ outdoor communication PCB	Indoor communication PCB did not receive signal from outdoor communication PCB for over 3 minutes continuously
	2	3	8	Communication error in outdoor communication PCB ↔ outdoor unit	Outdoor communication PCB did not receive communication signal from outdoor unit for over 3 minutes continuously



P/NO : MFL42947632

JUNE, 2014