

## **Contents**

PTVK430			
Item	Flange	Screw	Insulation
Q'ty	1	4	1
Figure	0	② M4 x 10	3

## **Installation Procedure**

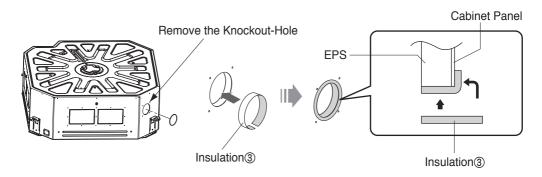

- 1. Remove the Knockout-Hole of the indoor cabinet with the cutter such as a nipper.
- 2. Adhere the insulation 3 to EPS and cabinet panel together.

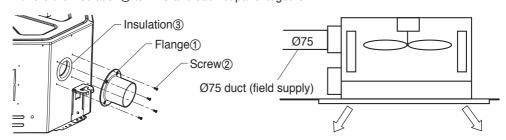

- 3. Attach the Flange(1) to the cabinet and fix it with the Screws (2).
- 4. Connect duct to the Flange(①), after connection, Flange(①) must be insulated.