

Specifications

E3KD Series		65SE3KD	55SE3KD	49SE3KD	43SE3KD	32SE3KD
PANEL	Screen Size	65"	55"	49"	43"	32"
	Panel Technology	IPS (PD)				
	Aspect Ratio	16:9				
	Native Resolution	1,920 x 1,080 (FHD)				
	Brightness	400 cd/m ²	350 cd/m ²			
	Contrast Ratio	1,300:1	1,100:1			
	Dynamic CR	500,000:1				
	Viewing Angle (H x V)	178 x 178				
	Response Time	10 ms (G to G BW), 7.6 ms (WOT)	12 ms (G to G BW), 9 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1 % (Typ.))				
Guaranteed Operating Hour	18 Hours					
Orientation	Landscape & Portrait					
CONNECTIVITY	Input	HDMI (2), DVI, RGB, Audio, USB				
	Output	Audio				
	External Control	RS232C (In/Out), RJ45, IR Receiver				
PHYSICAL SPECIFICATION	Bezel Color	Black				
	Bezel Width	11.9 mm (T/R/L), 18 mm (B)				13 mm (T/R/L), 18 mm (B)
	Monitor Dimensions (W x H x D)	1,456.9 x 838 x 56.5 mm	1,238 x 714.9 x 54 mm	1,102.2 x 638.5 x 54 mm	969.6 x 563.9 x 54 mm	729.4 x 428.9 x 55.5 mm
	Weight (Head)	27.9 kg	17.5 kg	14.3 kg	10 kg	5.4 kg
	Weight (Head + Stand)	33.1 kg	20.8 kg	17.6 kg	12.5 kg	6.2 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,456.9 x 898.1 x 293.7 mm	1,238 x 773.4 x 219.6 mm	1,102.2 x 696.8 x 219.6 mm	969.6 x 622.2 x 193 mm	729.4 x 481 x 154.2 mm
	Carton Dimensions (W x H x D)	1,561 x 977 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm	1,052 x 650 x 123 mm	810 x 510 x 132 mm
	Packed Weight	33.8 kg	21.7 kg	17.4 kg	12.6 kg	6.7kg
	VESA™ Standard Mount Interface	300 x 300 mm			200 x 200 mm	
SPECIAL FEATURES	USB Content Scheduling, Conformal Coating, SNMP Support, Wi-Fi Ready (Dongle), Power Management Modes (Sustain Aspect Ratio / Stand-by Screen, etc.), No Signal Image setting, Enhanced ISM (Image Sticking Minimization) Mode, Holiday Schedule / Local Time Auto Setting, Fail-over (USB, RGB, DVI, HDMI), Wake on LAN					
ENVIRONMENTAL CONDITIONS	Operating Temperature Range	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C
	Operating Humidity Range	10 % to 80 %	10 % to 80 %	10 % to 80 %	10 % to 80 %	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz				
	Power Type	Built-In Power				
POWER CONSUMPTION	Typ.	95 W	70 W	65 W	60 W	50 W
	Smart Energy Saving	70 W	55 W	50 W	45 W	35 W
AUDIO POWER		20 W (10 W x 2) for Internal Speaker (6 ohm)				
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC				
	EMC	FCC Class "A" / CE / KCC				
	ErP / Energy Star	NA / Yes (Energy Star 7.0)				
MEDIA PLAYER COMPATIBILITY	External Media Player Attachable	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)	Yes (MP500 / MP700)	No
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign W				
	Control and Monitoring Software	SuperSign C				
ACCESSORIES	Basic	Remote Controller (2 batteries included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender				
	Optional	Stand (ST-652T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-492T), Media Player, Wall Bracket (LSW350B), VESA Adapter (AM-B330S)	Stand (ST-432T), Media Player, Wall Bracket (LSW230B), VESA Adapter (AM-B220S)	Stand (ST-322T), Wall Bracket (LSW230B)

Simple Way to Manage Your Digital Signage
Standard Essential SE3KD Series



Built-in Speaker Model (10 W x 10 W)


Key Features

Sleek Design



Slimmer Bezel

The thinner bezel allows a perfect fit for a sleek look.



Detachable Logo

Portrait mode allows the logo to be positioned in the desired setting.




Cable Management

The well-organized cable terminals in the back optimize available space.



Connectivity

- 1 RS-232C IN
- 2 RS-232C OUT
- 3 AUDIO IN
- 4 AUDIO OUT
- 5 EXT IR IN
- 6 HDMI in 1
- 7 HDMI in 2
- 8 DVI-D IN
- 9 LAN
- 10 RGB IN
- 11 USB

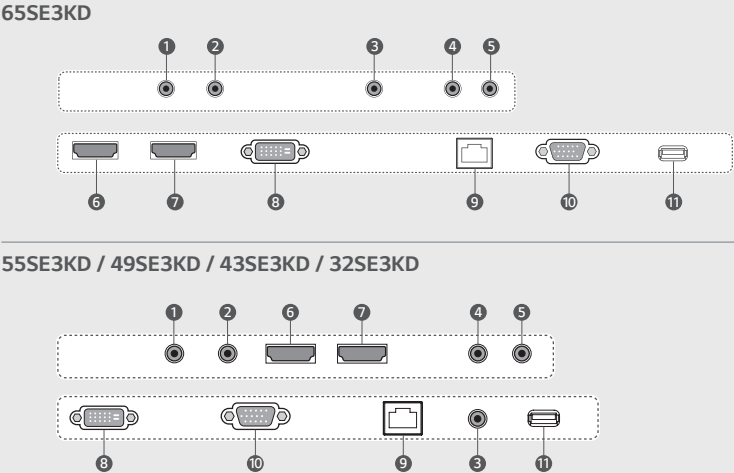

Download LG Commercial Display Mobile App



Learn more www.lg.com/b2b
[YouTube](https://www.youtube.com/channel/UCGECCommercialDisplay) [youtube.com/c/LGECCommercialDisplay](https://www.youtube.com/channel/UCGECCommercialDisplay)

LG may make changes to specifications and product descriptions without notice.
Copyright © 2017 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.



Simple Way to Manage Your Digital Signage

Standard Essential SE3KD Series



Screen Sizes
65", 55", 49", 43", 32"



SE3KD Series


- Edge-lit LED
- Brightness: 350 cd/m² (65": 400 cd/m²)
- Bezel: T/L/R-11.9 mm (32": 13.0 mm), B-18.0 mm
- Depth: 38.6 mm (65": 41.1 mm, 32": 55.5 mm)
- HDMI (2), DVI, RJ45, IR Receiver, RS232C in/out, USB
- Built-in Speaker: 10 W x 10 W

Other Features

Convenient Management


Enhanced Connectivity

Through its diverse interface, the signage lets you connect more than one device for optimal use.

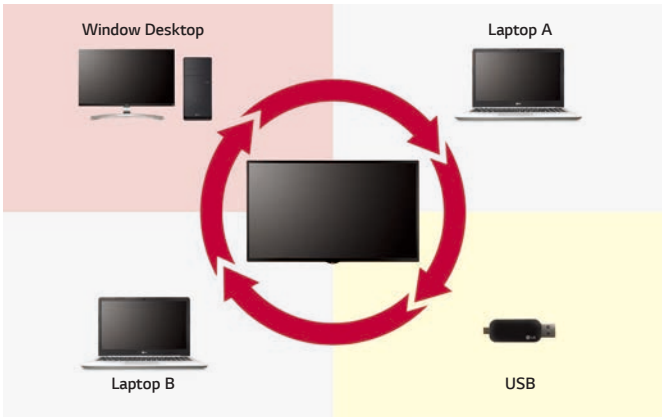

Wi-Fi Support

SE3KD Series supports Wi-Fi USB dongle connection for convenient content distribution. And SNMP support ensures convenient network management.

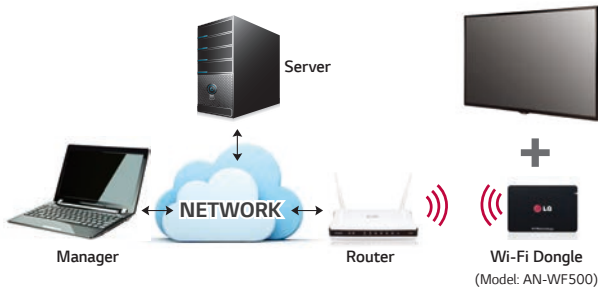

* SNMP: Simple Network Management Protocol

Convenient Screen Mode

Aspect Ratio Sustainability*

Sustain the same resolution and picture quality while powering on/off by receiving EDID¹⁾ through switch IC.



1) Extended Display Identification Data.
* Installation Menu > LG Digital Signage > PM Mode

Stand-by Screen*

Even without signal from the media player, the network does not turn off completely, so remote control is possible, which prevents unnecessary power usage and enables efficient management.



Scheduled Screen Wash**

Prevent residual images with the screen transition feature.





** Installation Menu > ISM Method

Dimension (unit : mm)



65"

1,456.9 x 838 x 56.5 /
27.9 kg

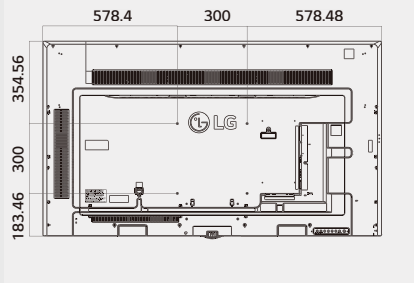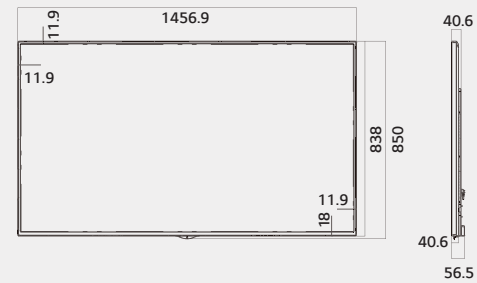



55"

1,238 x 714.9 x 54 /
17.5 kg

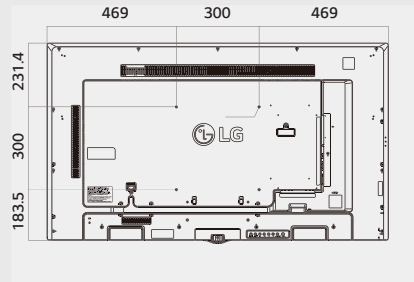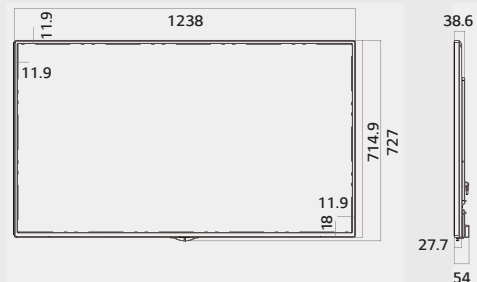



49"

1,102.2 x 638.5 x 54 /
14.3 kg

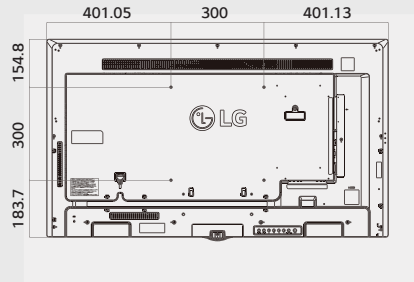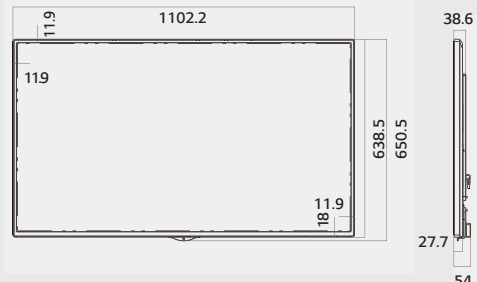

43"

969.6 x 563.9 x 54 /
10 kg

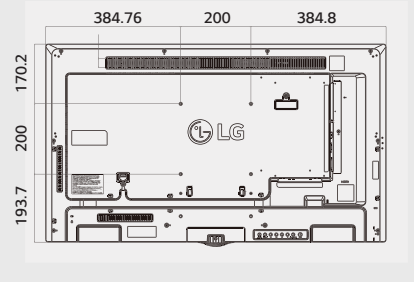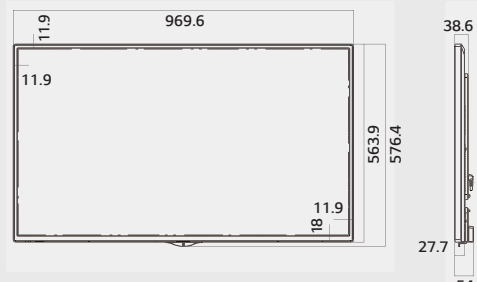

32"

729.4 x 428.9 x 55.5 /
5.4 kg

